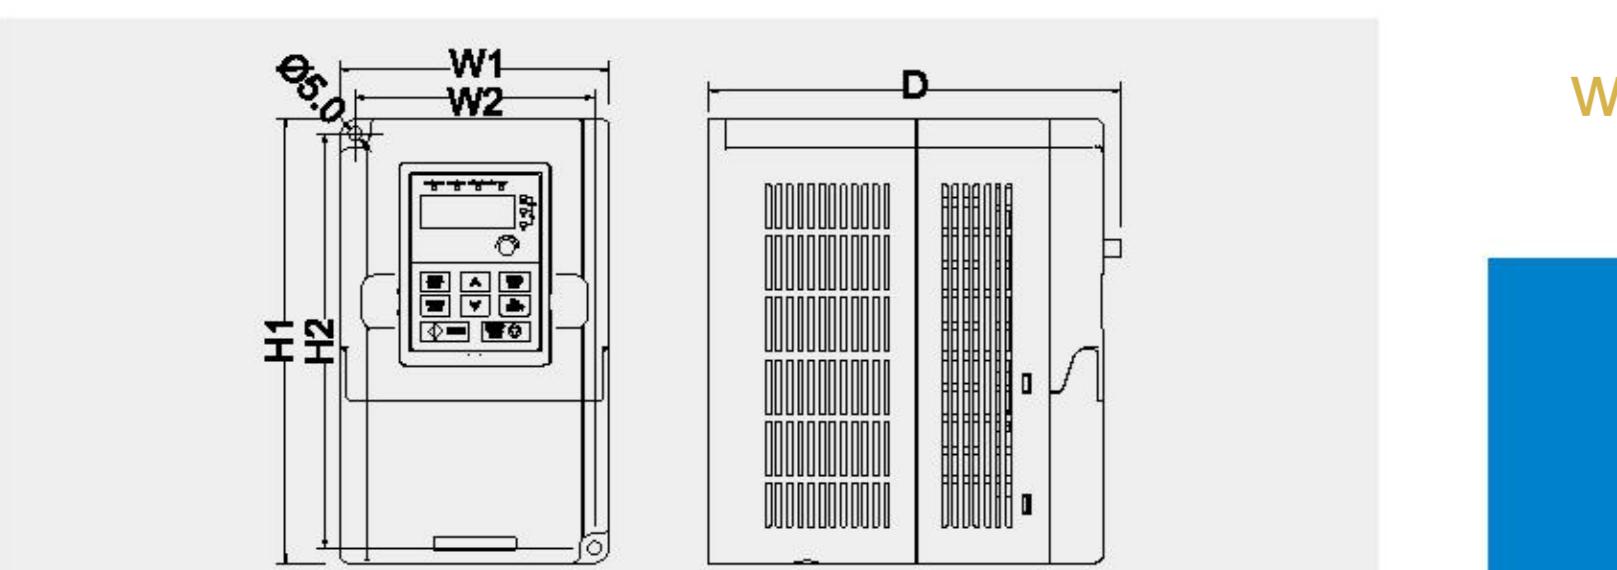
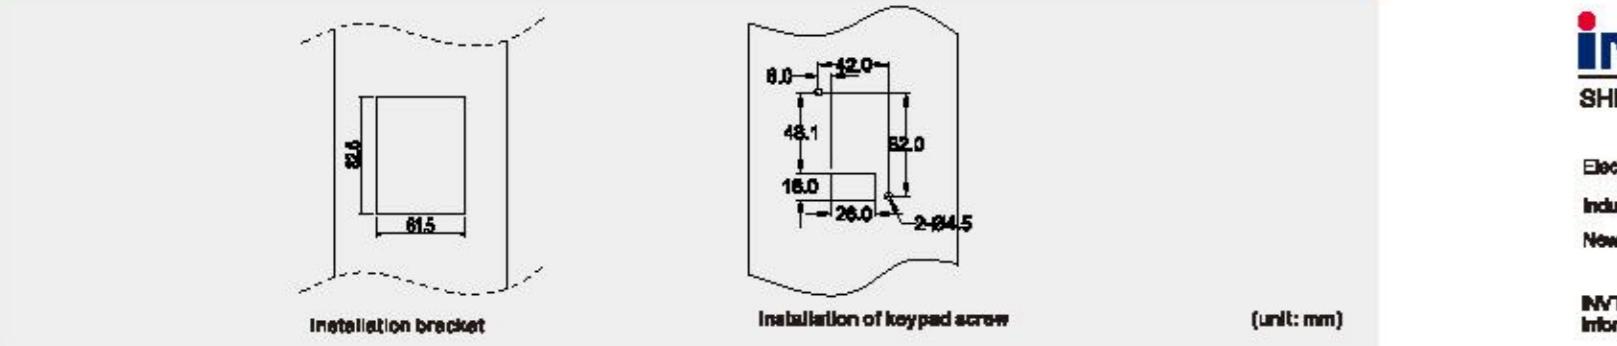



Installation dimension**1. VFD dimensions**

Model	W1 (mm)	W2 (mm)	H1 (mm)	H2 (mm)	D (mm)
GD10-0R2G-82-B	85	75	140	132	134.2
GD10-0R4G-82-B		75	140	132	153.2
Single-phase 220V		75	140	132	153.2
GD10-1R5G-82-B		100	89	165	154
GD10-2R2G-82-B					163.2
	GD10-0R2G-2-B	85	75	140	132
	GD10-0R4G-2-B	85	75	140	134.2
Three-phase 220V	GD10-0R7G-2-B	85	75	140	132
	GD10-1R5G-2-B	100	89	165	154
	GD10-2R2G-2-B	100	89	165	154
Three-phase 380V	GD10-0R7G-4-B	100	89	165	154

2. External keypad installation

051-36512626
051-37644600


www.kalasanatisafaei.com

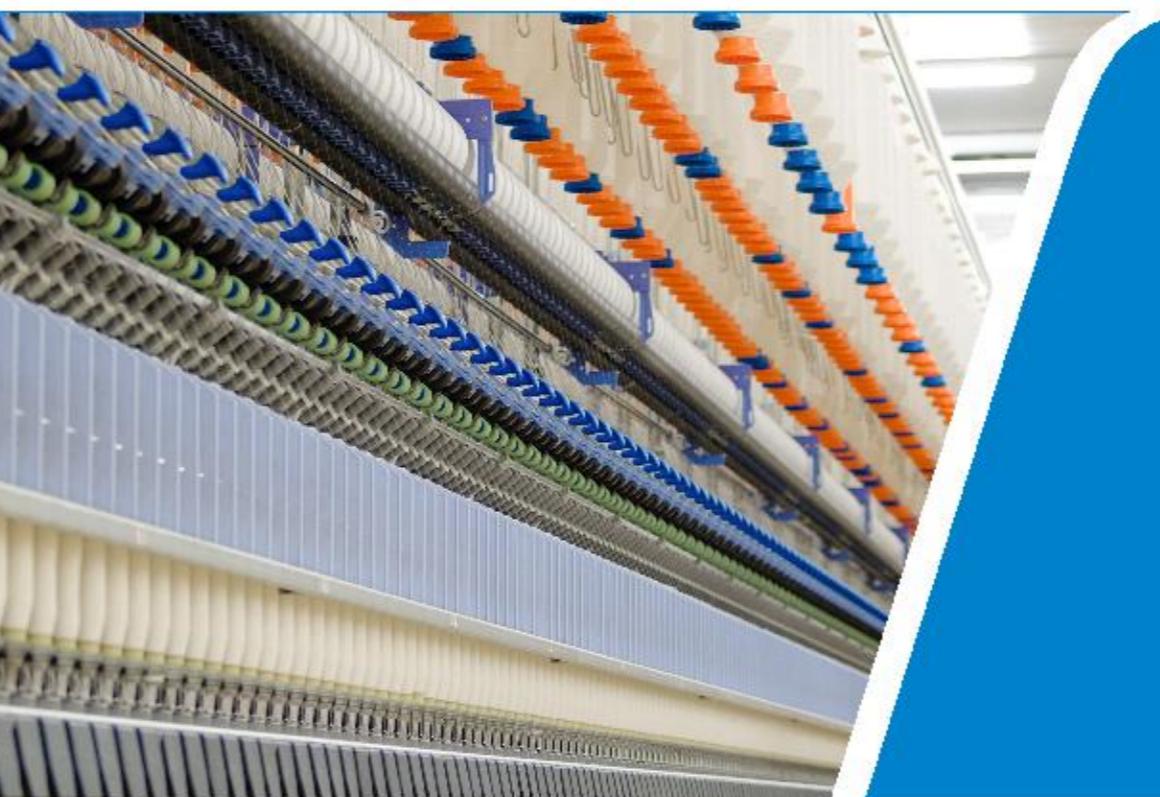**Gooddrive10 VFDs**

Innovation, Value, Teamwork



**Brief Introduction of Gooddrive10 VFDs**

Gooddrive10 Series mini-economy VFDs are designed for the small-power OEM application market. With The function of vectorization V/f control and PID function, multi-step speed, DC braking and Modbus communication and so on, the Inverter has more advantages but occupied less installation space.

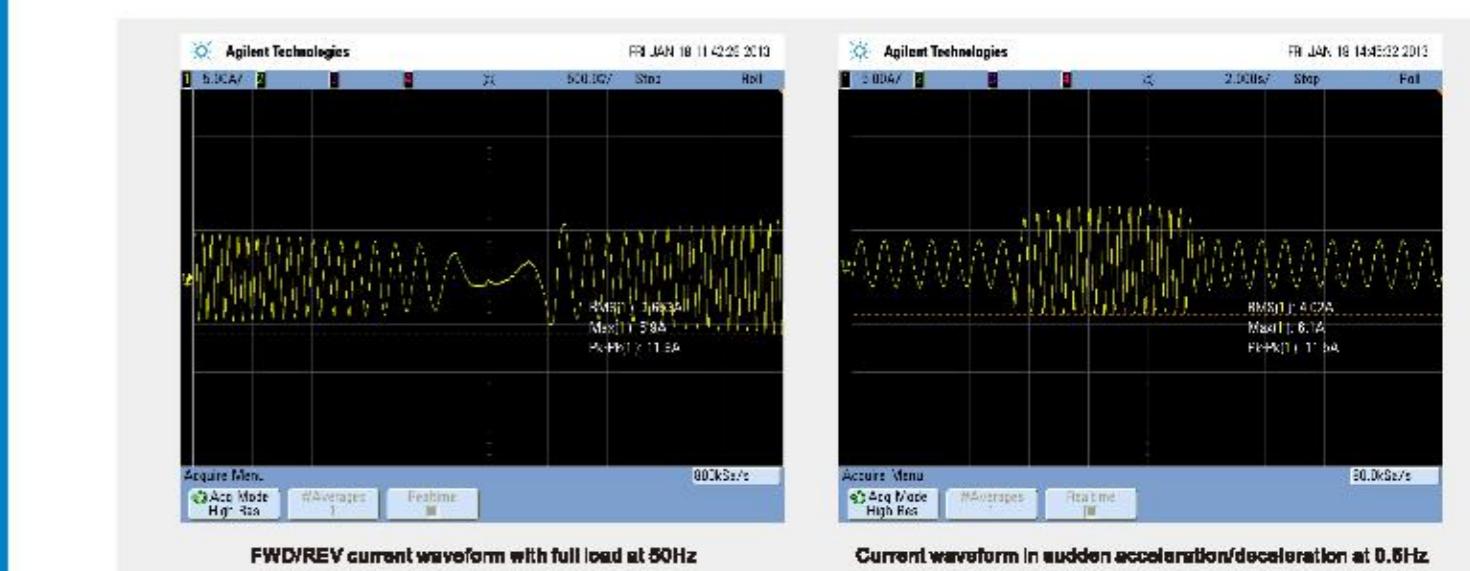Advantages**1. V/f control****2. Natural cooling(for the applications with cotton and dust)**

Remarks:
1. Natural cooling: single phase or three phase 220V 0.2-0.75kW.
2. Airforced cooling: single phase or three phase 220V 1.5-2.2kW,
three phase 380V 0.75-2.2kW.



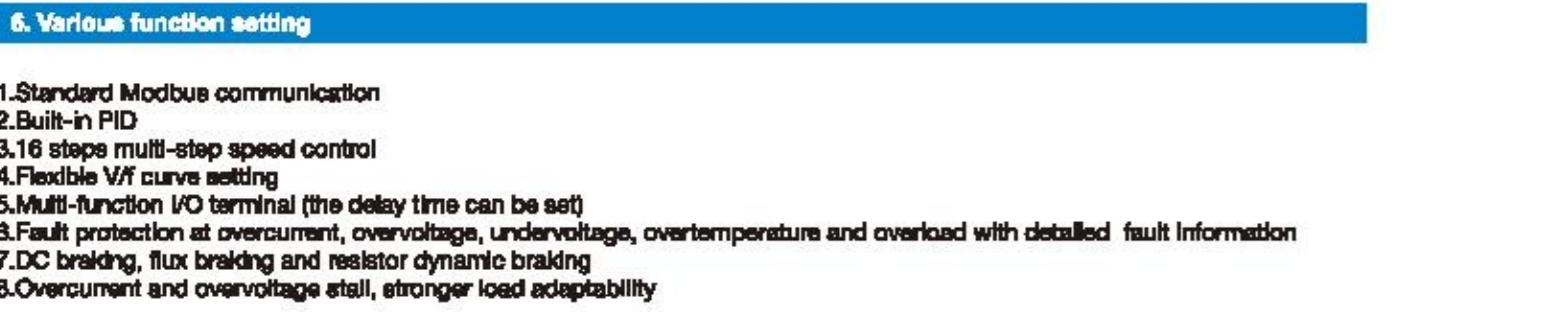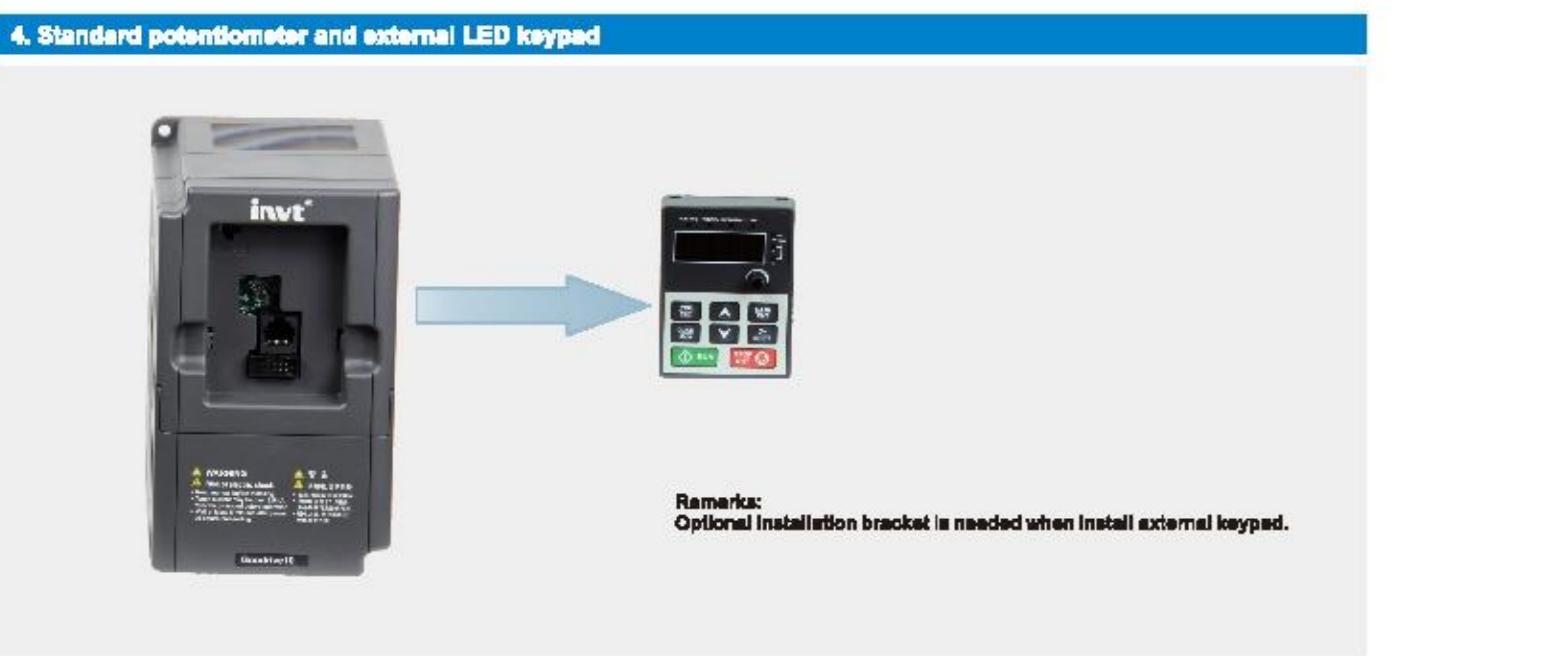



Technical specifications

Function	Specification
Input voltage (V)	Single phase 220(-15%)-240(+10%) Three phase 220(-15%)-240(+10%) Three phase 380(-15%)-440(+10%)
Input frequency (Hz)	50Hz or 60Hz Allowed range: 47-63Hz
Output voltage (V)	Equal to input voltage with the deviation less than 5%
Output frequency (Hz)	50Hz/60Hz, Fluctuation range: ±5%
Control mode	V/f
Maximum output frequency	400Hz
Adjustable-speed ratio	1:100
Overload capability	150% of rated current: 1 minute, 180% of rated current: 10 seconds, 200% of rated current: 1 second
Terminal analog Input resolution	≤20mV
Terminal switch Input resolution	≤2ms
Analog Input/output	1 Input 0~10V/0~20mA; 1 output 0~10V/0~20mA
Digital Input/output	5 common input, 1 Y output (commonly used with digital output) and 1 programmable relay output
Communication	485 communication
Mountable method	Wall mountable
Temperature of the running environment	-10~50°C, derate above 40°C
Cooling	Single/three-phase 220V 0.2-0.75kW natural cooling Single/three-phase 220V 1.5-2.2kW, three-phase 380V 0.75-2.2kW
Fault protections	Overcurrent, overvoltage, undervoltage, overtemperature, overheat and other protections
Braking unit	Only standard for GD10-B

Applications:

Packaging machinery, food machinery, textile machinery, centrifuge, engraving machine, and cutting machine, etc.

Standard wiring

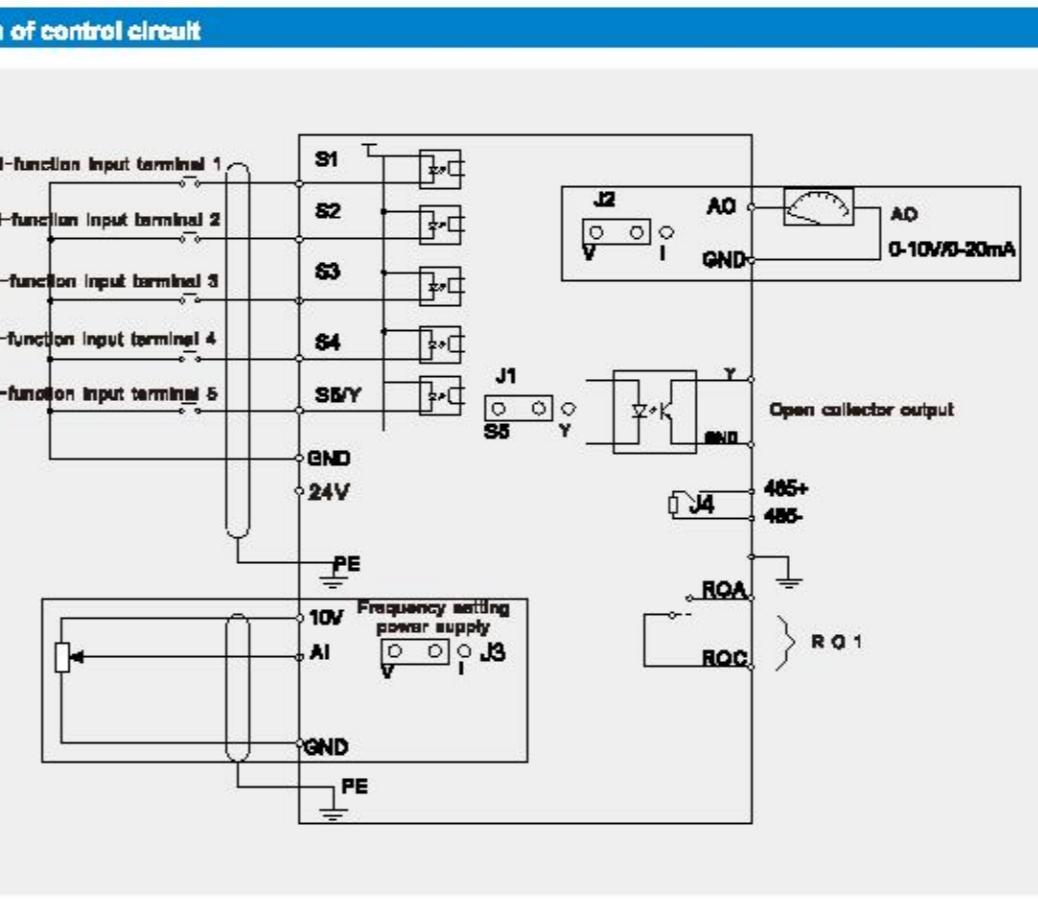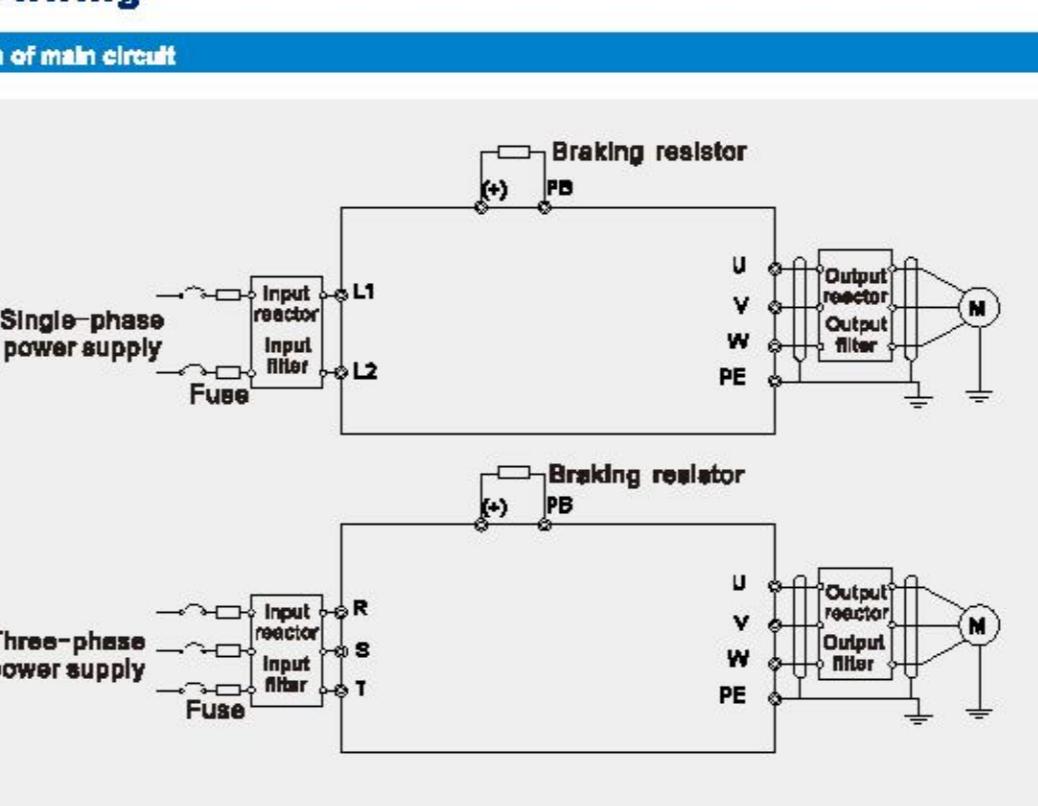

Standard wiring

Wiring diagram of main circuit			
GD10 - 2R2G - 4 - B			
①	②	③	④
Field identification	Sign	Detailed description of the sign	Detailed content
Abbreviation	①	Product abbreviation	Goodrive10 is shorted for GD10
Rated power	②	Power range + Load type	2R2-2.2kW GC: constant torque load
Voltage degree	③	Voltage degree	4:three-phase 380V 2:three-phase 220V S2:single-phase 220V
Lot No.	④	Lot No.	Default: No braking unit B: Built-in braking unit
Rated specifications			
Model		Output power(kW)	Input current(A)
Single-phase 230V		GD10-0R2G-S2-B	0.2
		GD10-0R4G-S2-B	0.4
		GD10-0R7G-S2-B	0.75
		GD10-1R5G-S2-B	1.5
		GD10-2R2G-S2-B	2.2
Three-phase 230V		GD10-0R2G-2-B	0.2
		GD10-0R4G-2-B	0.4
		GD10-0R7G-2-B	0.75
		GD10-1R5G-2-B	1.5
		GD10-2R2G-2-B	2.2
Three-phase 400V		GD10-0R2G-4-B	0.75
		GD10-1R5G-4-B	1.5
		GD10-2R2G-4-B	2.2
		GD10-0R2G-2-B	4.3
		GD10-0R4G-2-B	7.1
		GD10-0R7G-2-B	5.5